



[APPLY CONFIGURATION] [REBOOT]

System Information

Settings

- [General Settings](#)
- [IP Settings](#)
- [Wireless Settings](#)

Services

- [QoS Settings](#)
- [Firewall Settings](#)
- [DHCP Settings](#)
- [Port Forwarding](#)

Security

- [Wireless](#)
- [Device Settings](#)

Status

- [Interfaces](#)
- [Services](#)

Commands

- [Firmware Upgrade](#)
- [Load Configuration](#)
- [Save Configuration](#)

System Information:

Device Information

Device Type: OSBRIDGE 24XLGI
MAC Address: 00:15:d6:02:78:70
Software Version: Boot v. 3, Firmware v. 1.11R
Hardware Revision: 1
Regulatory Domain: ETSI


Connection Information

Status: Connected
BSSID: 26:a7:d4:e4:4f:4d
Signal Strength: Not Available
Signal Quality: Not Available
Link Quality: 50%
Operational Rate: 1Mbps
Tx Packets: 13
Tx Bytes: 3742
Rx Packets: 0
Rx Bytes: 0


Operational Settings

Device Name: OSBRIDGE 24XLG
WLAN Operational Mode: Bridge
IP Operational Mode: Bridge
WLAN Mode: 802.11b/g
Uptime: 1 min
System Load: 0.08, 0.05, 0.01
ESSID: v13.freiesnetz.www.funkfeuer.at
Channel: 13
SSID Broadcast: Enabled
Preferred BSSID: 26:a7:d4:e4:4f:4d
PPPoE Authorization: Disabled
PPPoE Link Status: Not Connected
Auto Rate Fallback: Disabled
Preamble Type: Long
Beacon Period: 100 milliseconds
Fragmenation Threshold: 2346
RTS Threshold: 2347
Supported Data Rates: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps
DTIM Period: 2
ACK Timeout: 15
CCA Mode: 2
IP Address: 192.168.1.250
Subnet Mask: 255.255.255.0
Default Gateway: 192.168.1.1
DHCP: Disabled
Traffic Shaping: Disabled
Firewall: Disabled
Web Server on port: 80
Authorization Algorithm: Open System
Intra BSS Traffic: Enabled
Wireless Traffic Forward: Disabled
WEP: Disabled
Watchdog: Disabled to IP: 0.0.0.0
Web Login Timeout: 60 seconds
Ethernet Speed: 100Mbps FD

Interface Utilization:

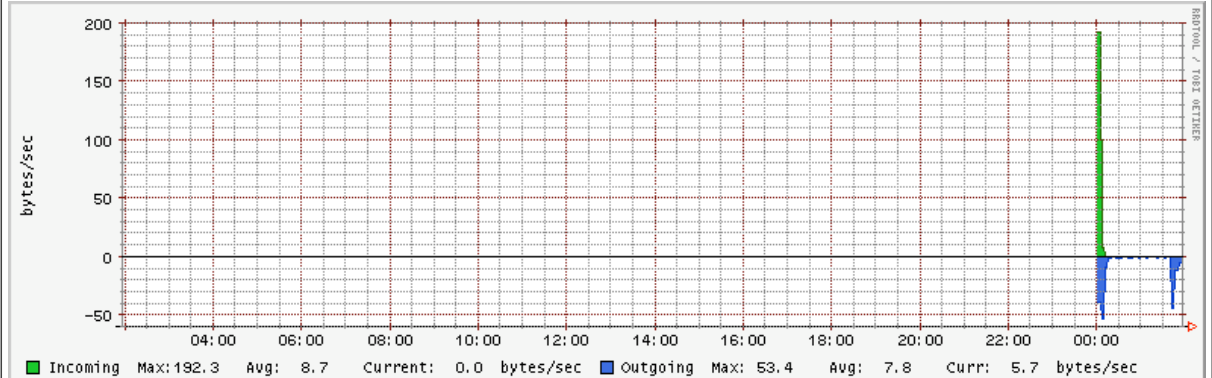

Packets Per Second:

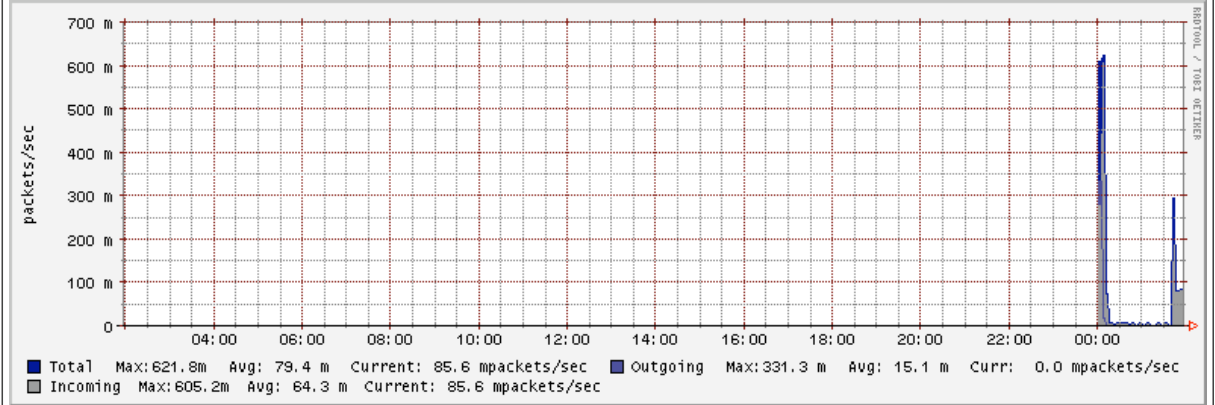

Signal Strength:

